



Counter Attachment



Insert screws, located on underside of counter, into holes on mount plate. Secure with wing nuts.


*** Vertical Extrusion Connector**

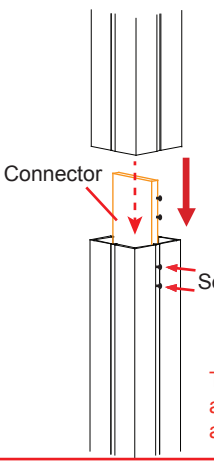

Slide upper Extrusion over Connector and rest on lower Extrusion. Secure with Set Screws.

To prevent product loss, Keep all screws attached to Connector, after disassembling.

*** Monitor Mount**




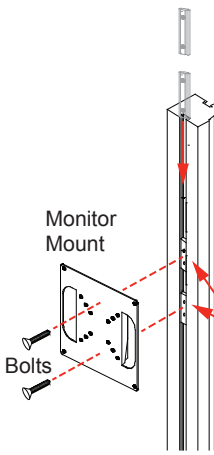


Slide connectors into groove of extrusion. Tighten set screws to secure connectors in place. Attach monitor mount back plate to extrusion, using bolts.

Item	Qty.	Description
1	1	Base Plate
2	1	42.5" Q914 Vertical Extrusion
3	1	42.5" Q914 Vertical Extrusion
4	4	38.5" RSG510 Angled Extrusion
5	2	18" Z31 Horizontal Extrusion


Steps:

- 1) Attach vertical [2] to vertical [3], using connector. See **Vertical Extrusion Connector** detail.
- 2) Attach mount plates to angled verticals [4], using bolts.
- 3) Attach vertical assembly [1/2] and angled verticals [4] to base plate [1], using bolts.
- 4) Connect horizontals [5] between angled verticals [4].
- 5) Place shelves on top of horizontal [5], then secure with thumb screws into [2].
- 6) Attach counters to angled verticals [4]. then secure with thumb screws into [2].
See **Counter Attachment** detail.
- 7) Connect conduit to vertical [2] and route monitor cords. See **Cord Management** detail.
- 8) Attach monitor mounts to vertical [3]. See **Monitor Mount** detail.
- 9) Attach headers to vertical [3], using screw caps into V4's.

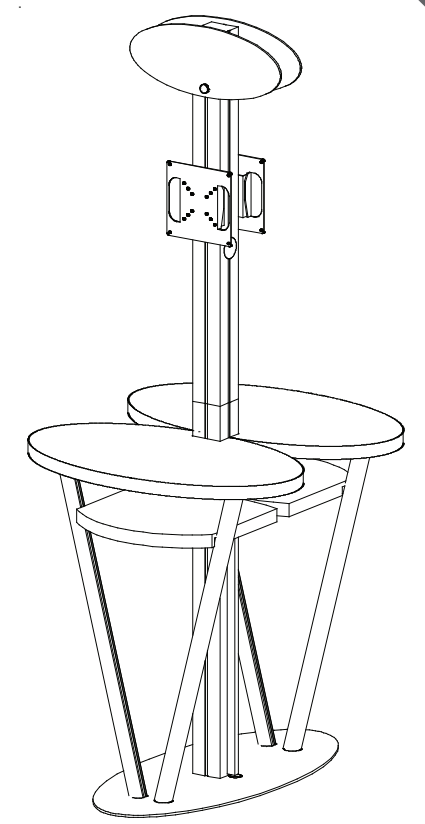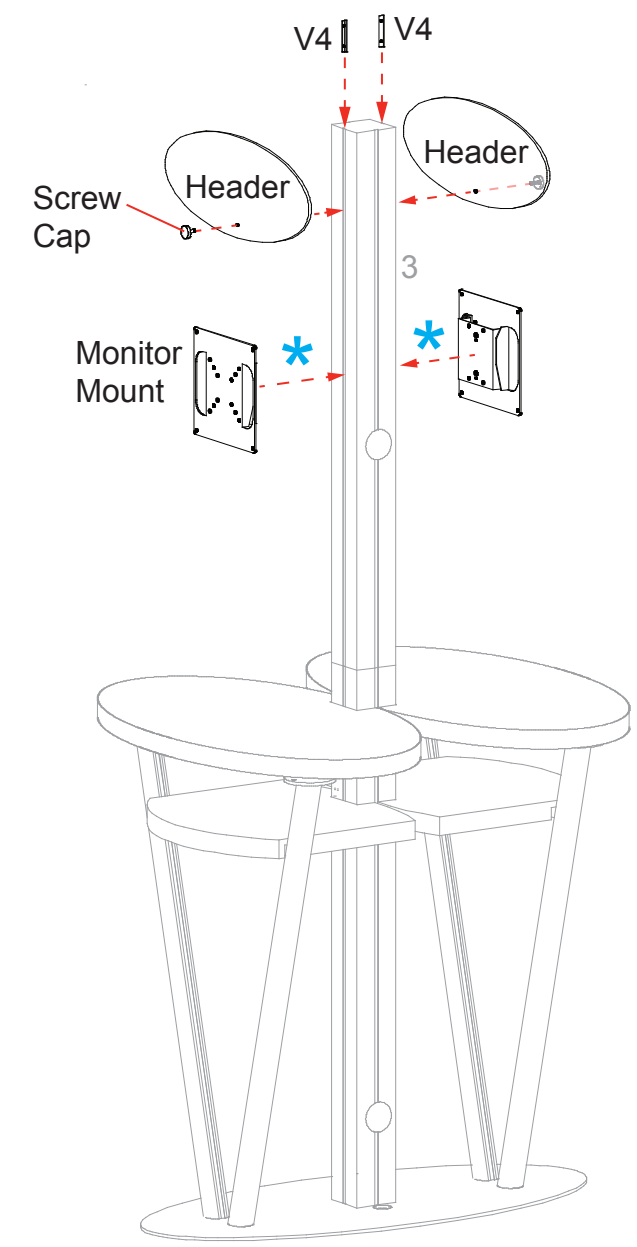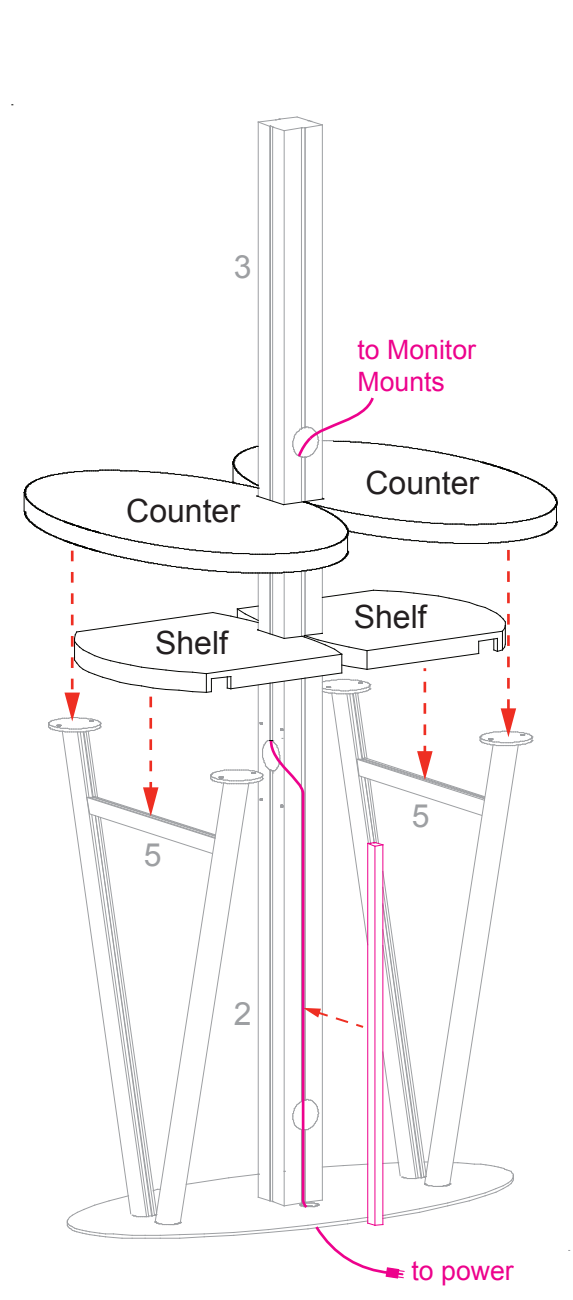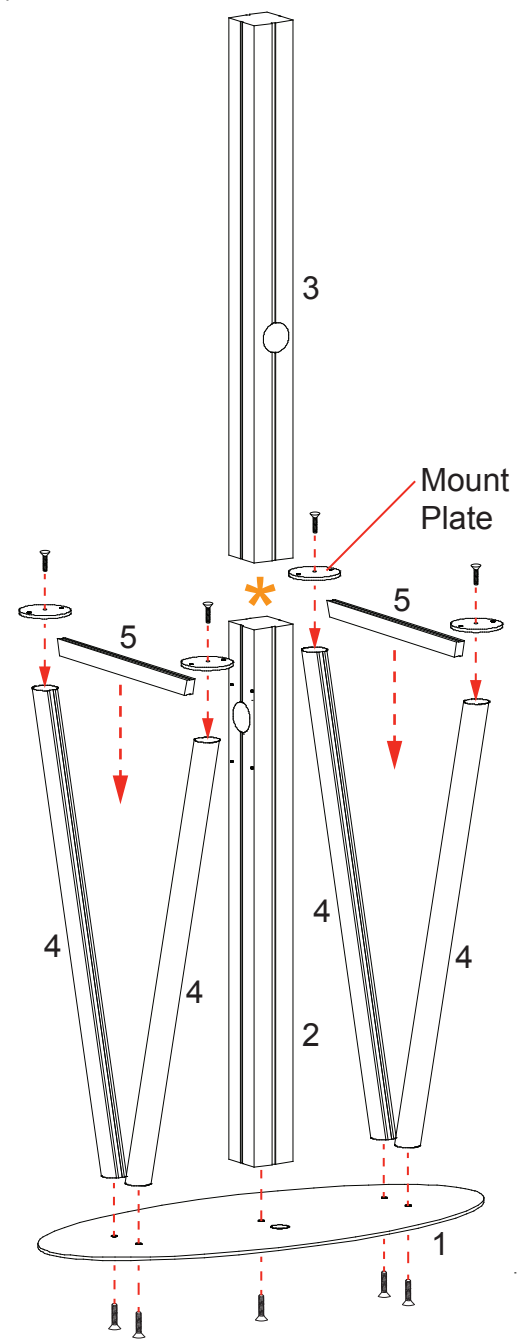

Completed Assembly

Cord Management

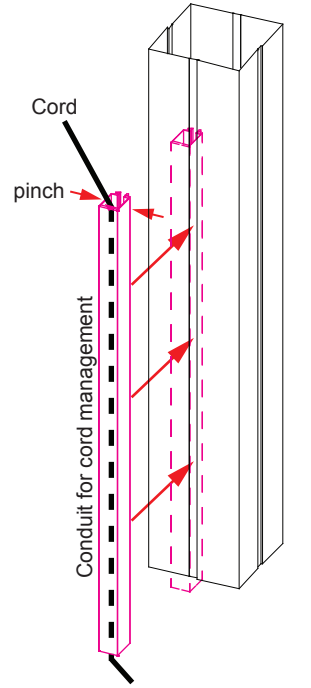

Route cord through Conduit. Attach Conduit by pinching the opening and inserting into the groove of Extrusion.

General Setup Instructions


- Read entire setup instruction manual prior to unpacking parts and pieces.
- The setup instructions are created specifically for this configuration.
- Setup instructions are laid out sequentially in steps, including exploded views with detailed explanation for assembly.

Cleaning & Packing


- For Cleaning Metal, Plex, & Laminate Parts: Use a **MILD NON-ABRASIVE** cleanser and soft cloth/paper towel to clean all surfaces.
- Keep exhibit components away from heat and prolonged sun exposure.
Heat and UV exposure will warp and fade components.
- Retain all provided Packing Materials. All provided packing materials are for ease of repacking & component protection.

Disassembly


- For loss prevention, tighten all setscrews and locks during disassembly

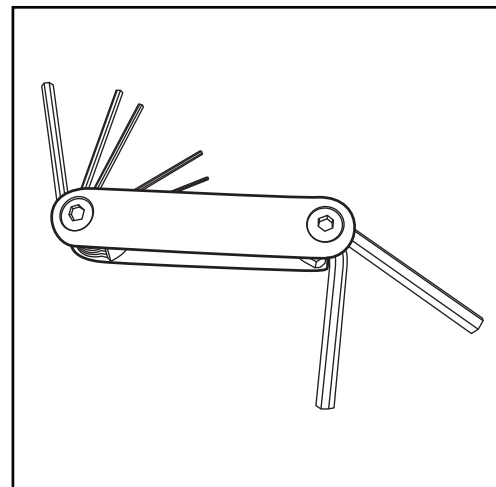


Hex Tool - Essential for Assembly

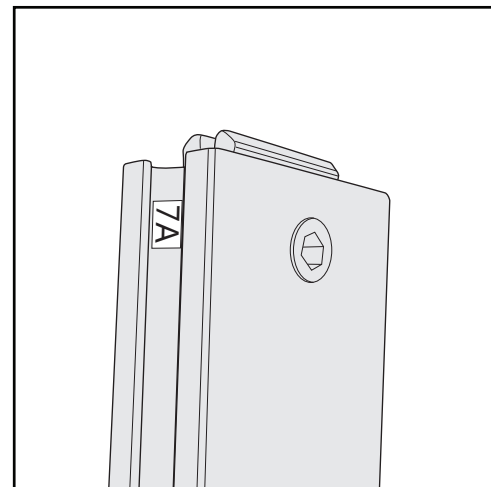


Part Identification - Numbering

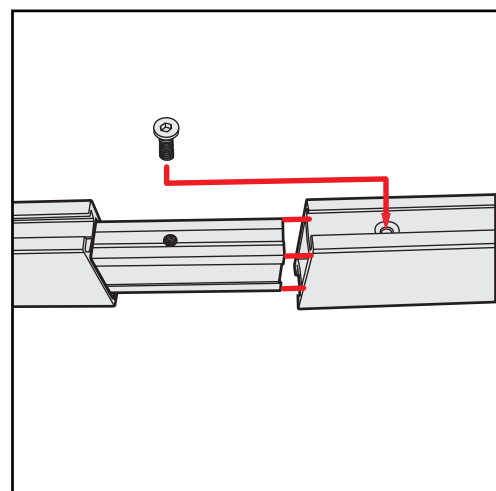


Spline Connection

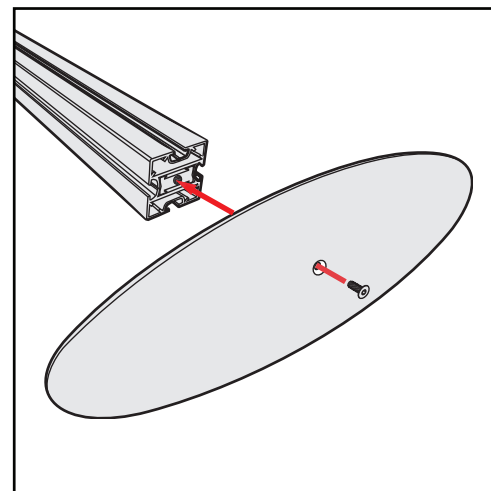

Base Plate & Extrusion Connection

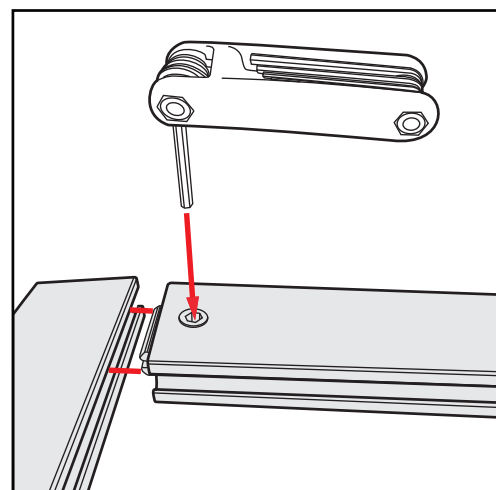

Extrusion & Lock Connection

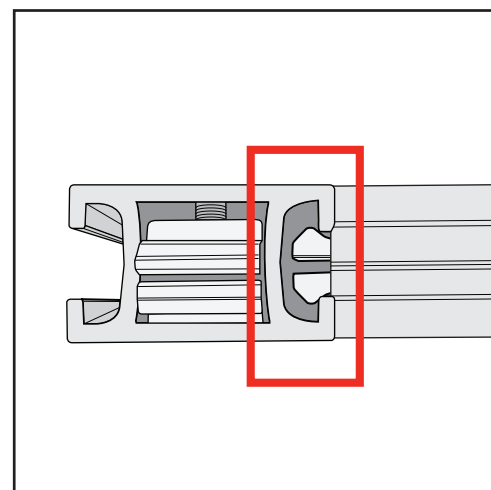

Engaged Lock



WARNING



DO NOT USE POWER TOOLS



LADDERS OR LIFTS
MAY BE REQUIRED



ALL CONNECTIONS MUST
BE TIGHTLY SECURED