



Top View

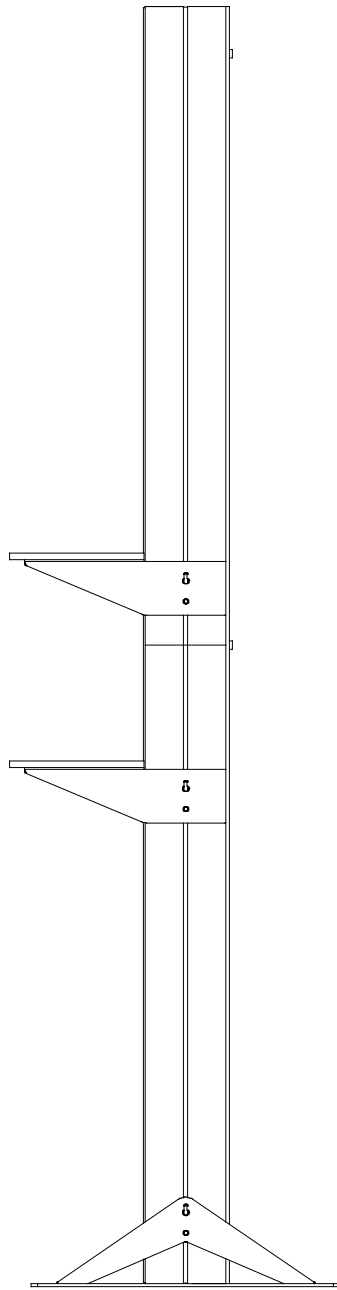

Side View

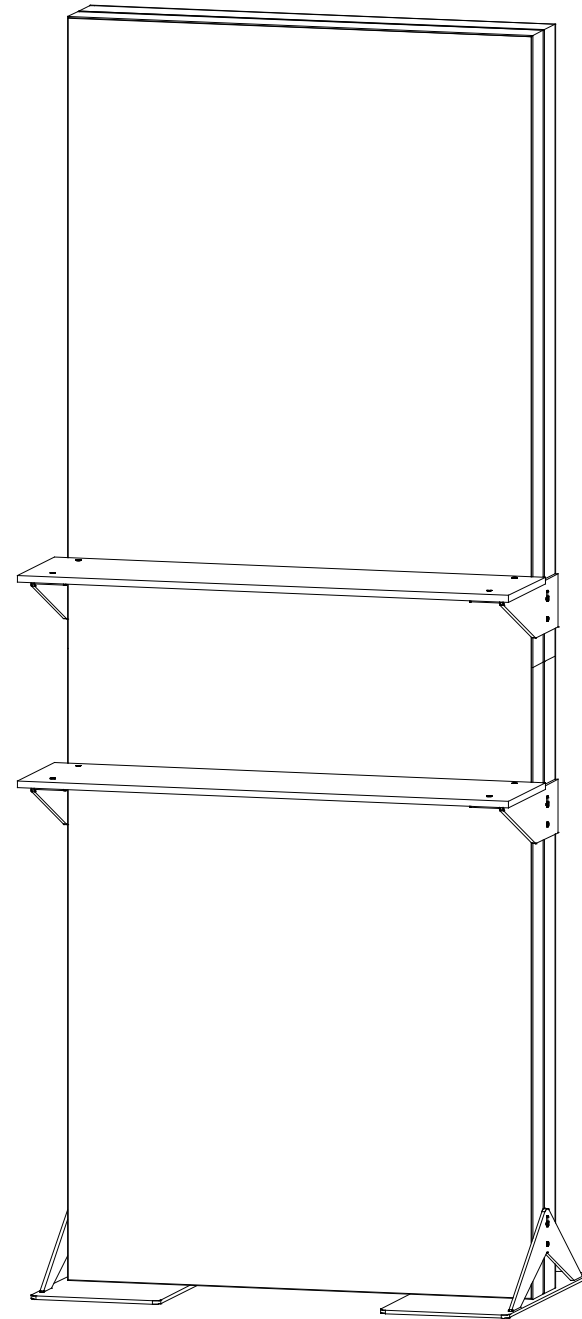

Perspective View

## General Setup Instructions


- Read entire setup instruction manual prior to unpacking parts and pieces.
- The setup instructions are created specifically for this configuration.
- Setup instructions are laid out sequentially in steps, including exploded views with detailed explanation for assembly.

## Cleaning & Packing


- For Cleaning Metal, Plex, & Laminate Parts: Use a **MILD NON-ABRASIVE** cleanser and soft cloth/paper towel to clean all surfaces.
- Keep exhibit components away from heat and prolonged sun exposure.  
**Heat and UV exposure will warp and fade components.**
- Retain all provided Packing Materials. All provided packing materials are for ease of repacking & component protection.

## Disassembly


- For loss prevention, tighten all set screws and locks during disassembly.

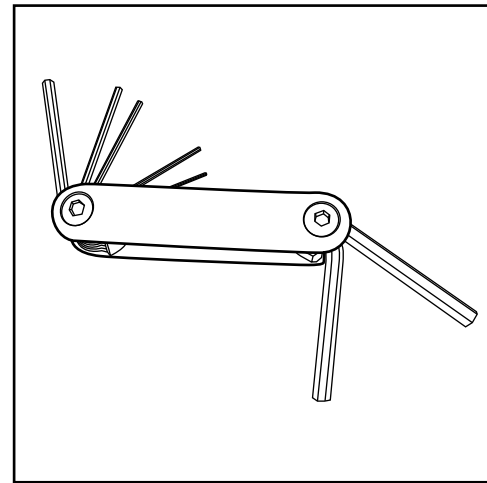


Hex Tool - Essential for Assembly

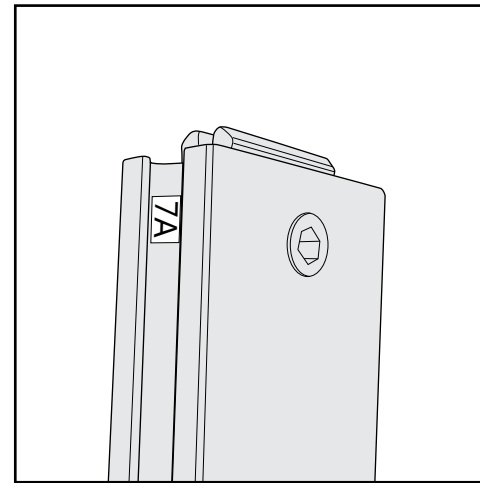


Part Identification - Numbering

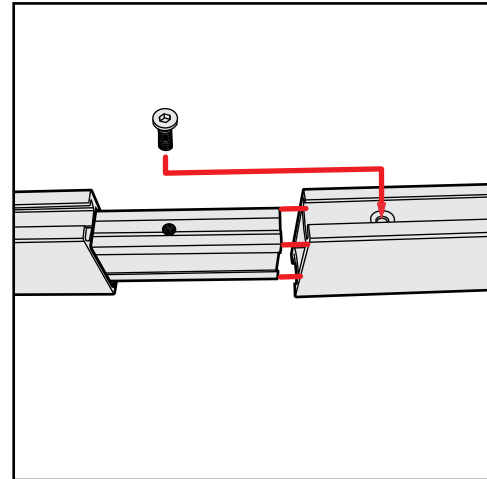


Spline Connection

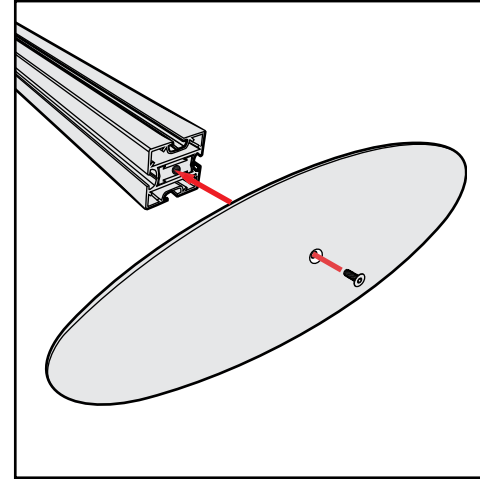

Base Plate & Extrusion Connection

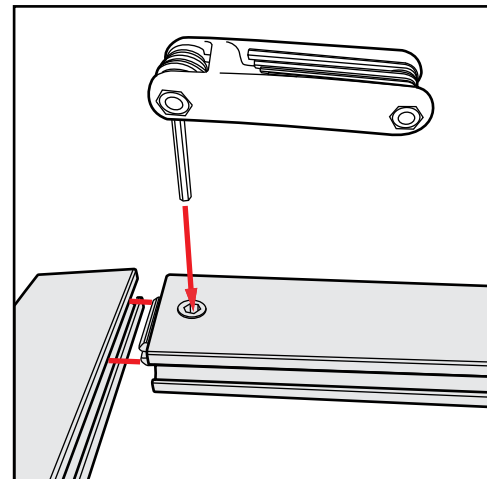


Extrusion & Lock Connection

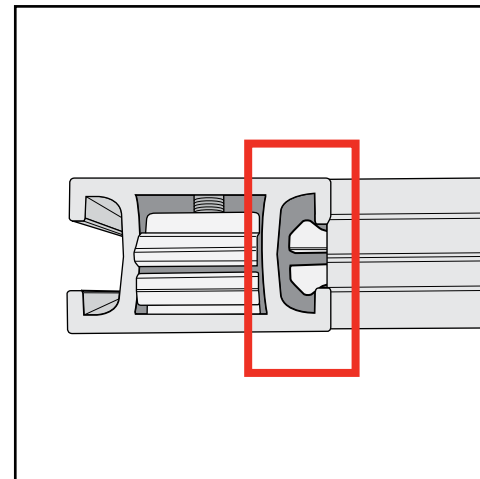


Engaged Lock



# WARNING



DO NOT USE POWER TOOLS



LADDERS OR LIFTS  
MAY BE REQUIRED




ALL CONNECTIONS MUST  
BE TIGHTLY SECURED


## Straight Connection

When assembling frame, first attach all **straight connectors**, then attach **corner connectors**.

- 1) Place extrusions end-to-end.
- 2) Loosen all knobs, then slide **straight connectors** across the seam of extrusions.
- 3) Tighten all knobs to secure connection.

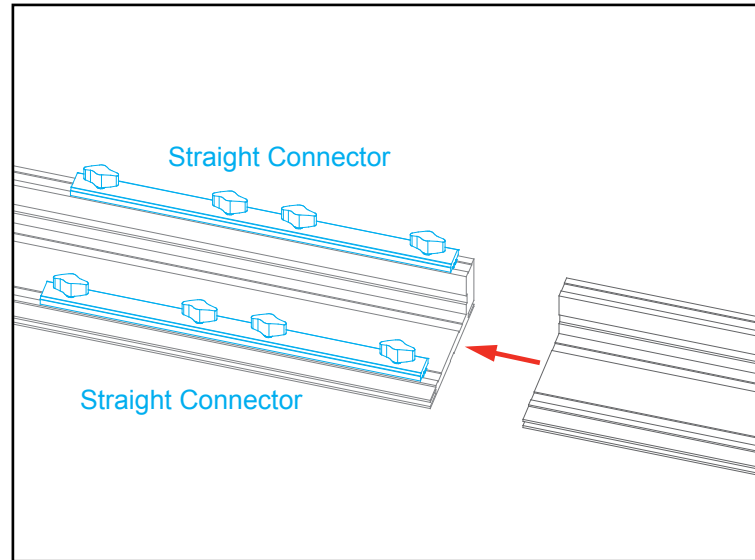

Slide both connectors across seam of extrusions.  
Tighten all knobs.

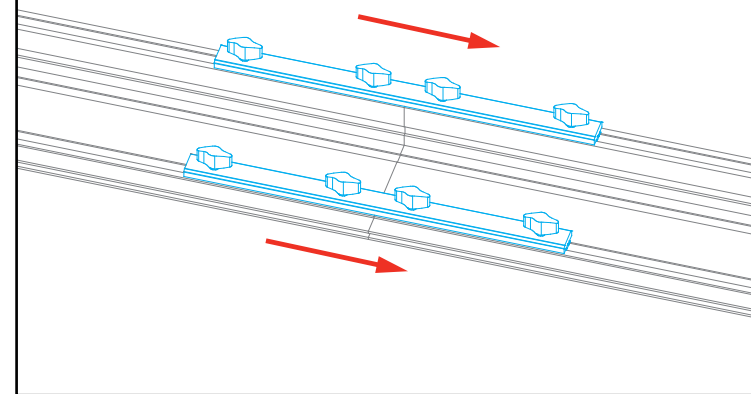

All knobs must be tightened securely to ensure a proper connection.

## Disassembly

- 1) Loosen all knobs.
- 2) Slide connectors off of one extrusion.
- 3) Tighten knobs to prevent loss during packing & shipping.


Keep straight connectors in groove of extrusion. Do not remove connectors during disassembly.

## Corner Connection


- 1) Loosen knobs, then slide vertical extrusions onto **corner connectors** of **lower** horizontal extrusion.
- 2) Slide **corner connectors** of **upper** horizontal extrusion into grooves of vertical extrusions.
- 3) Tighten all knobs to secure connection.

## Disassembly

- 1) Loosen knobs on vertical extrusions.
- 2) Slide the vertical extrusions off of **corner connectors** on lower and upper horizontal extrusions.

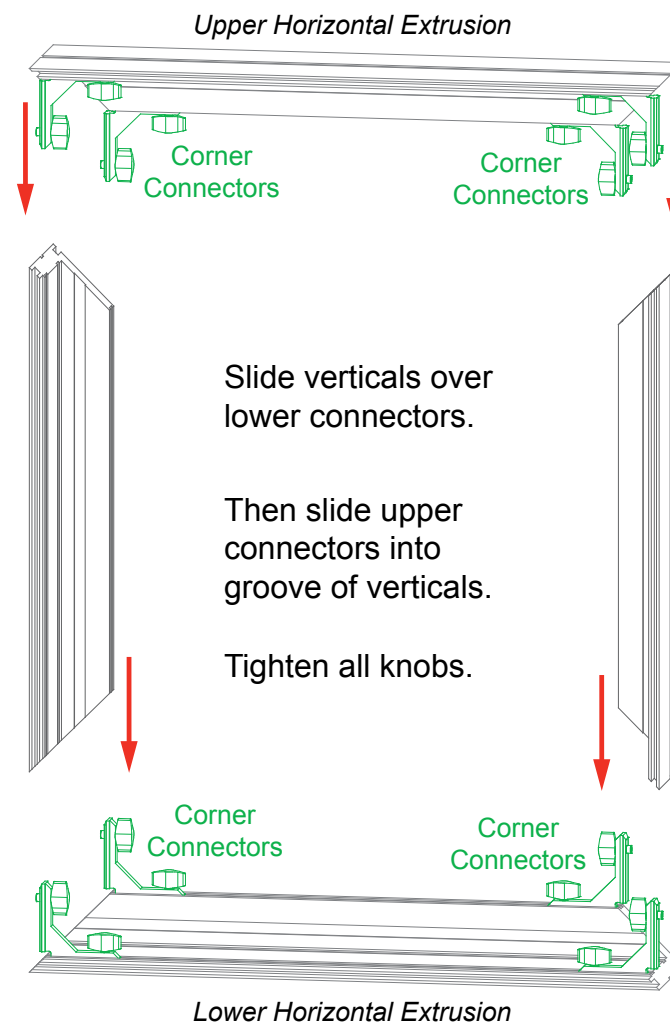


Adjust connectors if necessary to prevent gaps in connection.

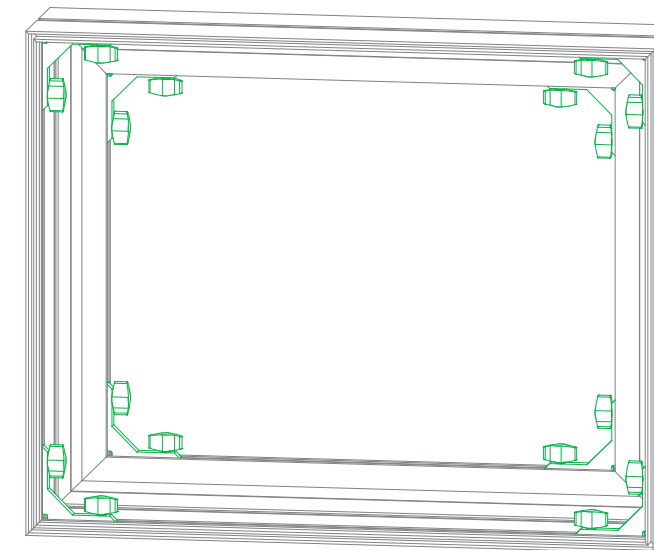


COMPLETED ASSEMBLY


All knobs must be tightened securely to ensure a proper connection.

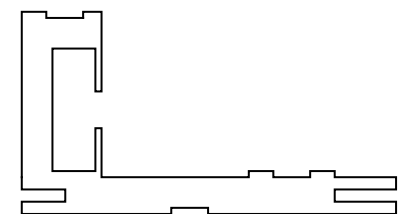

CEI110 Profile

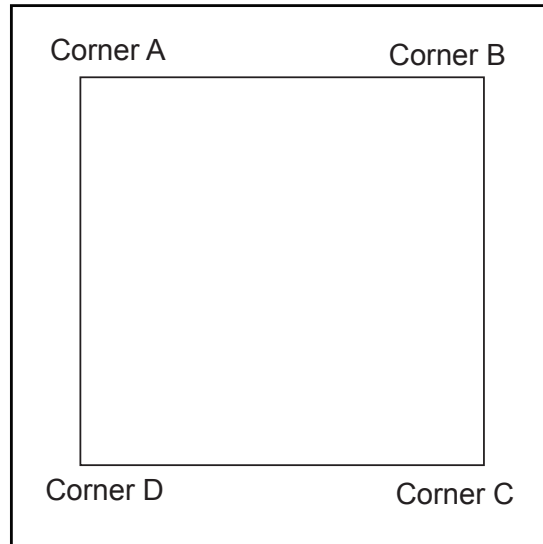

It is important to first insert graphic into each alternate corner then to the sides of the frame. If this is not done, graphic will not fit into the frame correctly.

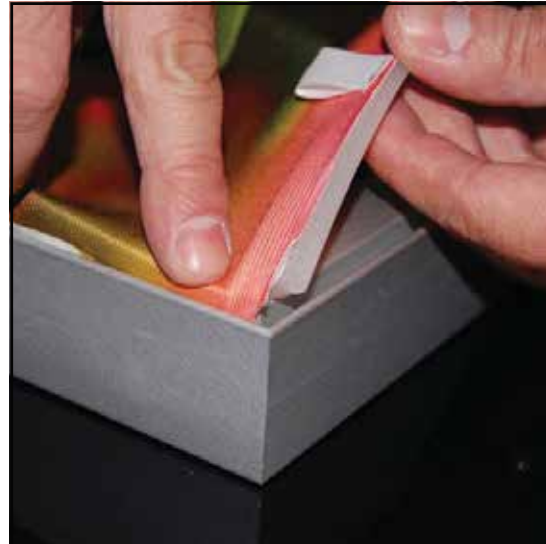

**Step 1**  
Insert corner A. Turn edge of graphic so silicon welt is perpendicular to face of graphic. Insert narrow side of welt with fabric to outside into the channel. Repeat for other side of this corner.




**Step 2**  
Repeat Step 1 for opposite corner C, then insert corner B, followed by corner D, to complete the installation of the corners.



**Step 3**  
Once all corners are inserted, press one silicon edge into channel from corners and work toward the center. Make sure welt is fully inserted into channel. Continue until all sides are done. Smooth out edges of graphic.

## Graphic Removal

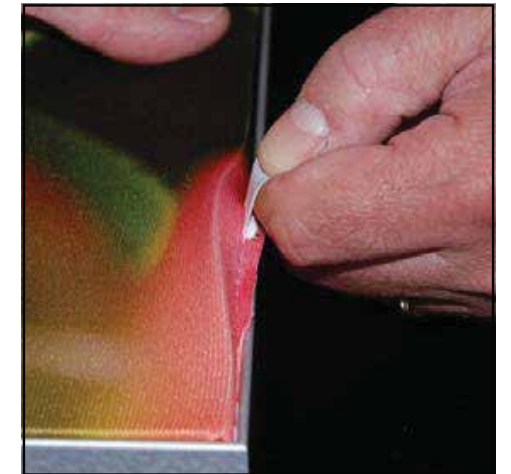





To remove the graphic from the frame, locate the fabric pull tab. Gently pull up on the tab to remove the fabric.

| Item | Qty. | Description                     |
|------|------|---------------------------------|
| 1,1A | 1,1  | 36" CEI152 Horizontal Extrusion |
| 2,2A | 1,1  | 47.5" CEI152 Vertical Extrusion |
| 3,3A | 1,1  | 47.5" CEI152 Vertical Extrusion |
| 4    | 2    | Base Plate                      |

Steps:

CEI110 frame can be assembled on the floor then lifted upright.

- 1) Connect verticals [2 to 2A] and [3 to 3A]. See CEI152 Frame Assembly sheet for Straight Connection Instruction.
- 2) Attach horizontals [1] and [1A] between vertical assemblies. See CEI110 Frame Assembly sheet for Corner Connection Instruction.
- 3) Attach base plates [4] to assembled frame. See Base Plate detail.
- 4) Connect lights and transformer. See Light Connection details.
- 5) Install SEG graphic to front of assembled frame. See SEG Installation sheet.

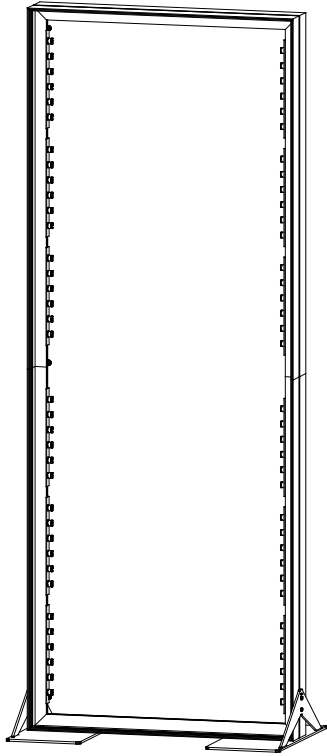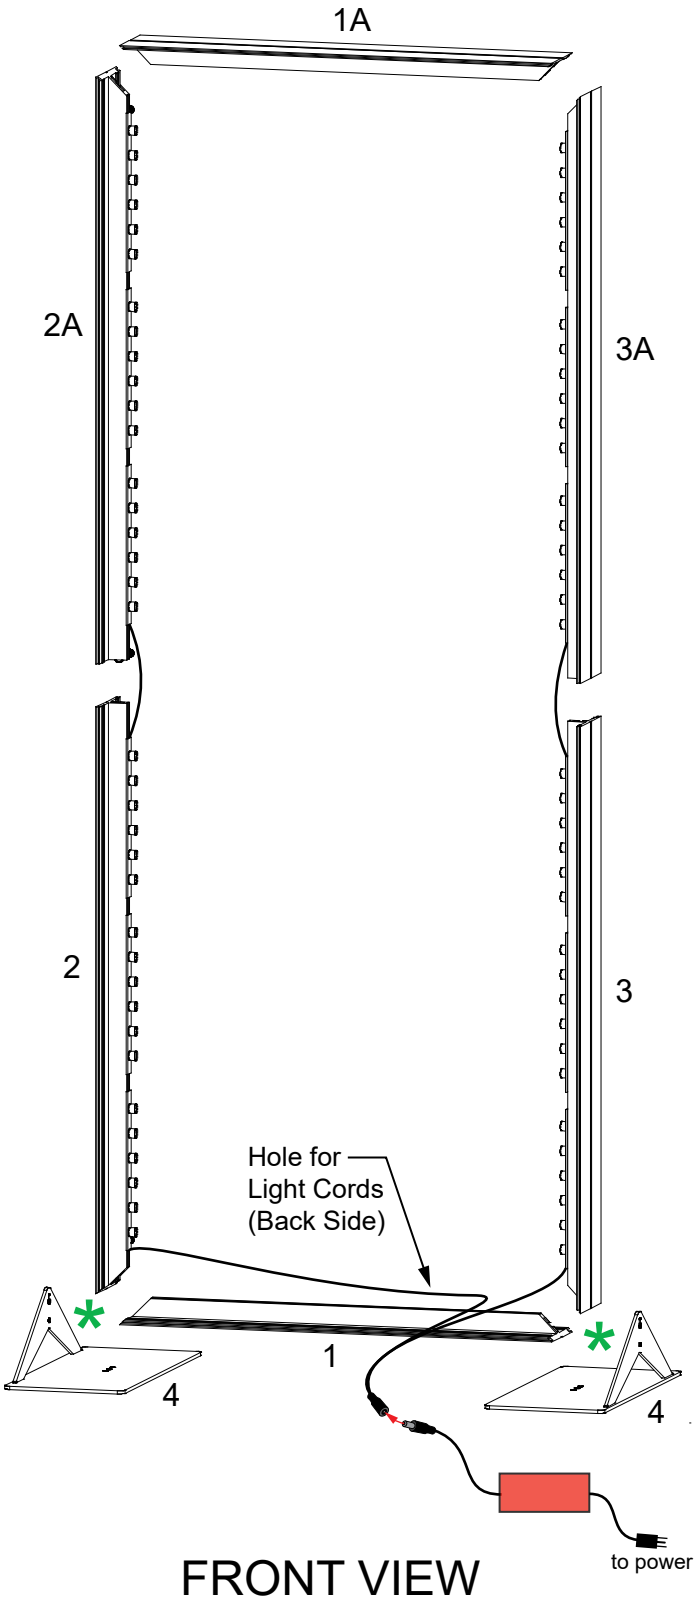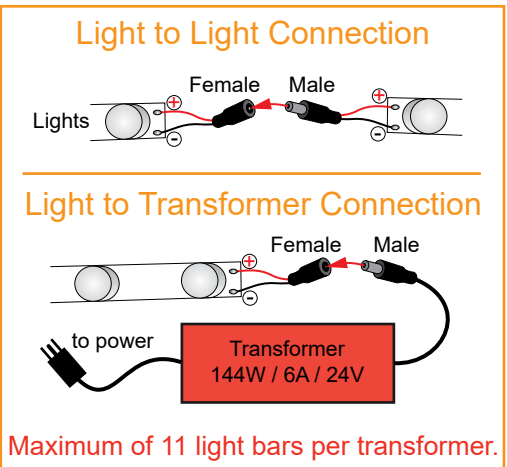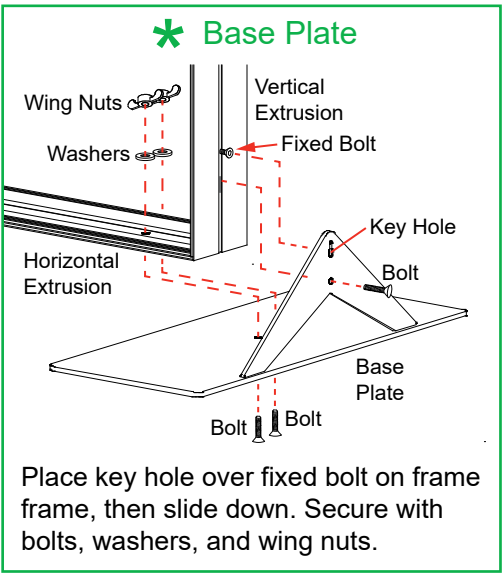


Completed Assembly





**Steps:**

- 1) Install SEG graphic to front and back of assembled frame.  
See SEG Installation sheet, for instructions.
- 2) Attach shelves to assembled CEI110 frame, where desired.  
See [Shelf Attachment](#) detail.


**\* Shelf Attachment**




1. Slide V4, with bolt, into groove of vertical extrusion then tighten bolt to secure V4 at desired location.
2. Place keyhole of shelf over bolt on V4 then slide shelf down.

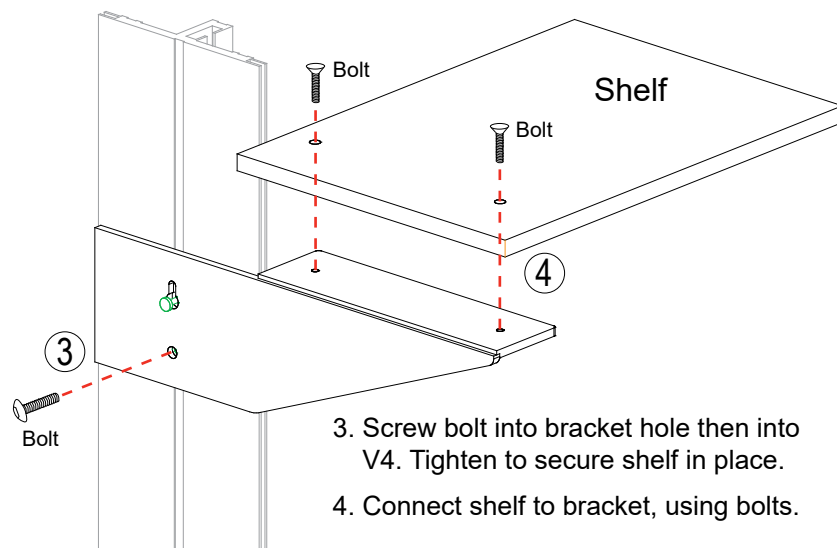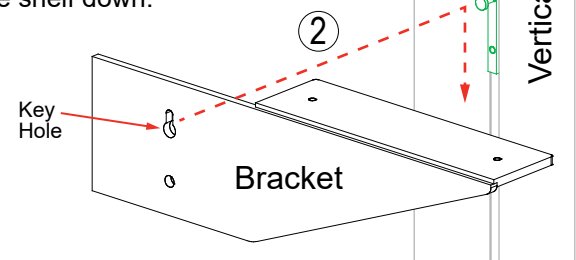

3. Screw bolt into bracket hole then into V4. Tighten to secure shelf in place.
4. Connect shelf to bracket, using bolts.

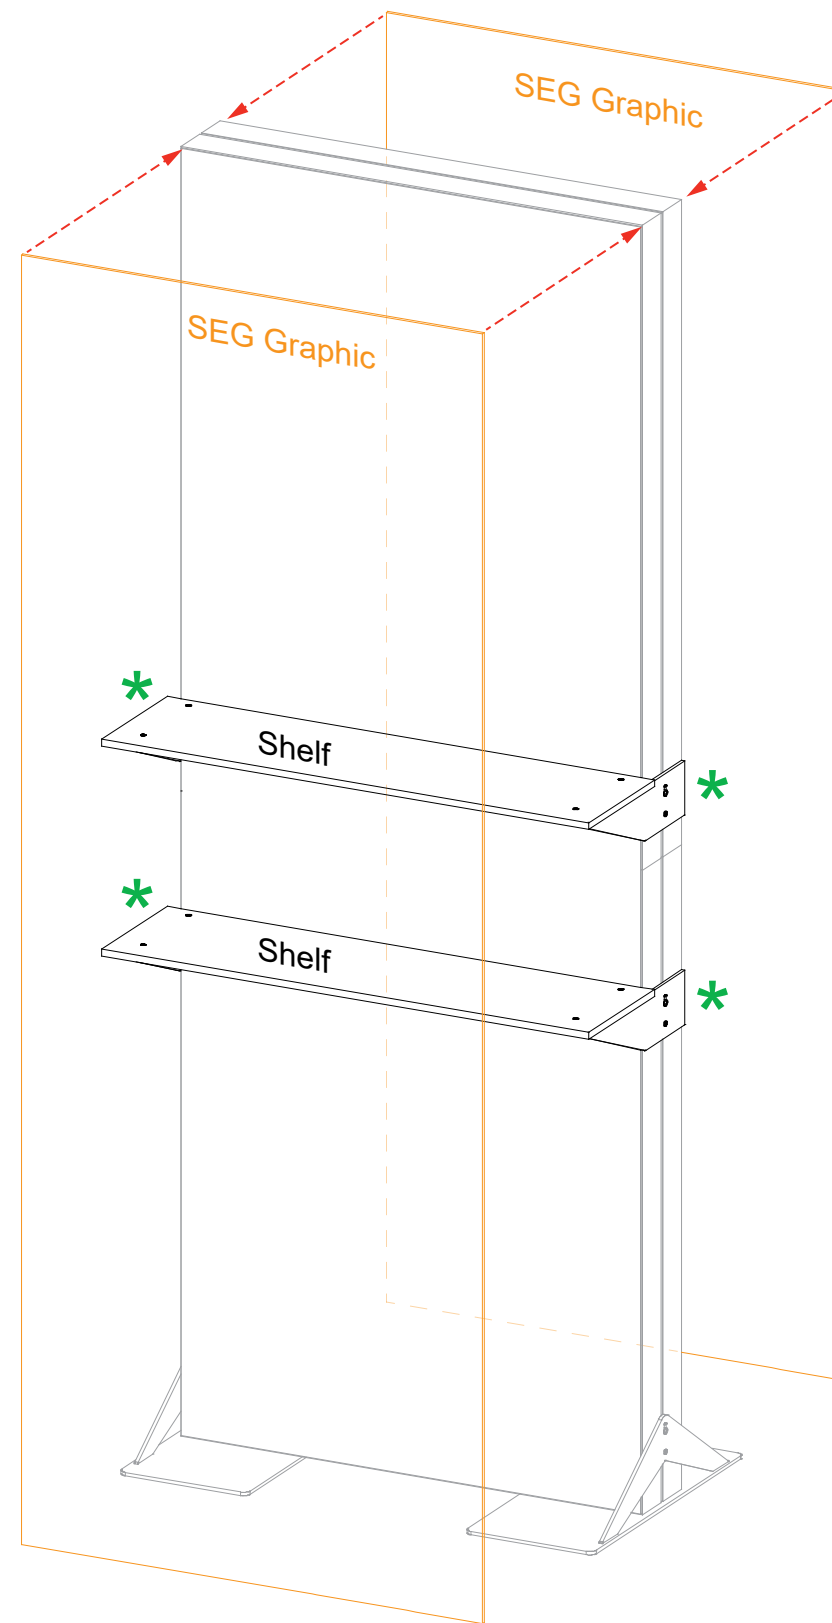

**FRONT VIEW**

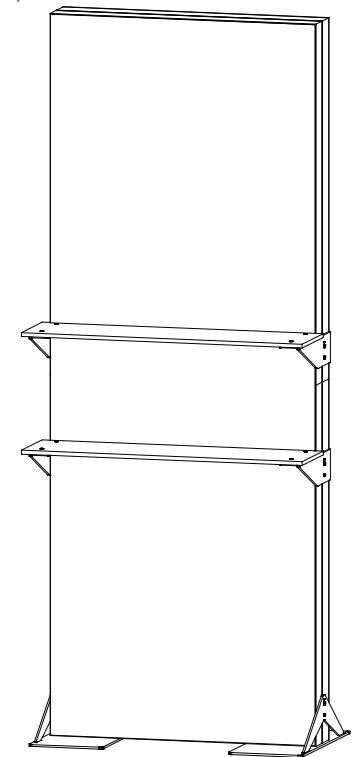

**Completed Assembly**